


CTU Presents

Grounding & Bonding for the
Little Pistol & Medium Gun
Ward Silver, NØAX

• CTU •
CONTEST
UNIVERSITY

ICOM®

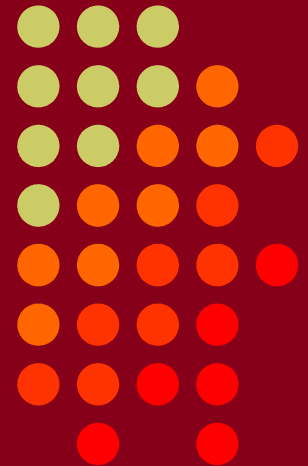

Overview



- What **IS** “ground” anyway?
- What **IS** “bonding” anyway?
- AC Safety
- Lightning Protection
- RF Management
- Ground System
- Resources

Goals of the Session






- Understand “ground” and “bond”
- Appreciate the different requirements for ac safety, lightning protection, RF and audio
- Illustrate some techniques
- Show how a system approach works
- Point you at more comprehensive resources

Who Is This Talk For?



- Station builders...
 - Just starting out
 - Putting up a first tower
 - Expanding a station
 - In lightning country
 - Trying for better performance
- But not really for...
 - K3LR, W3LPL, KC1XX, NR5M, K8UT, W8RA etc

Background References

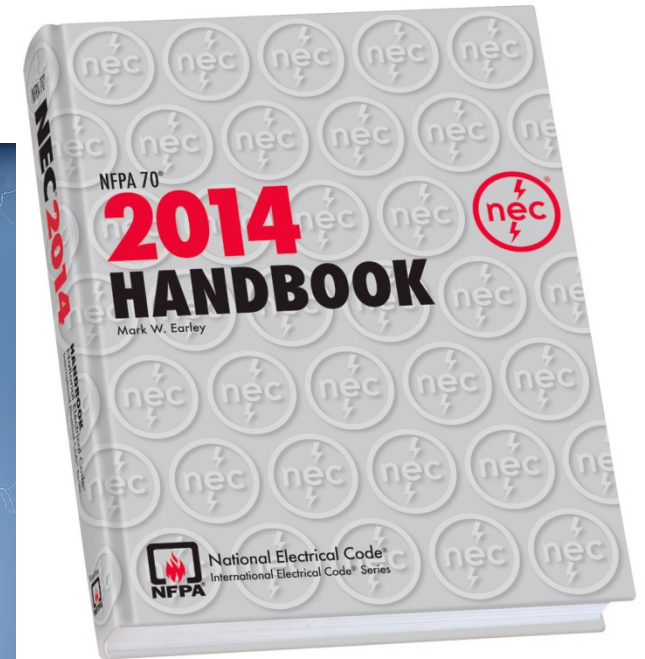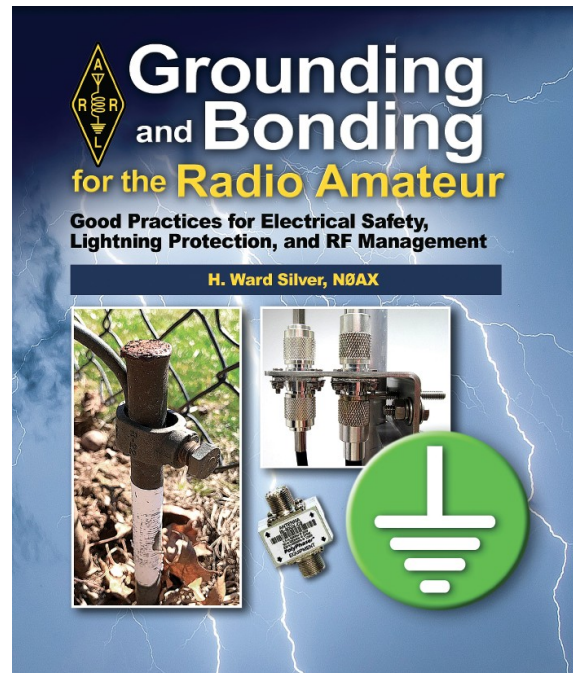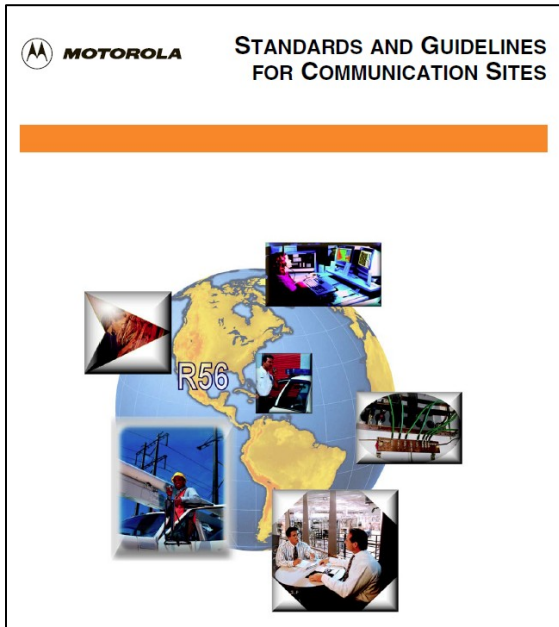

What IS “Ground” Anyway



- The right answer depends on what you are trying to do
- What you are trying to do depends on frequency, voltage, current
- Your **safety** depends on the right answer
- Your **equipment** depends on the right answer

What IS “Ground” Anyway



- It can be a noun, verb, and adjective – *all at the same time*
- Noun - an “earth connection” (ac, lightning) or a local reference potential (circuits, RF)
- Verb - an action “to connect to the reference potential”
- Adjective - a type of connection, such as a “ground conductor” or “ground system”

What IS “Ground” Anyway



- Fuzzy definitions:
 - “RF ground” – ain’t no such thing
 - “Ground loops” – not the problem you think it is
 - “Single-point ground” – it depends...
- The Earth is NOT – a magic sink into which we can pour RF or lightning and expect it to magically and safely disappear

What IS “Bonding” Anyway



- A connection intended to keep two points at the same voltage
- Sounds expensive but it's not
- Sounds hard but it's not
- Requires the right connecting materials and hardware
- Works in your favor for ac safety, lightning protection, and RF management

What IS “Bonding” Anyway



- For bonding to work, it has to be...
 - Low-Z and “short” at the frequencies of interest
 - Heavy enough to carry the expected current
 - Sturdy enough to survive the environment
- Inside the ham station, use...
 - Strap (20 ga) or heavy wire (#14 or larger)
 - Flat-weave braid
 - Braid from old coax deteriorates

AC Safety Grounding



- Before we go any further...

SAFETY FIRST

- Don't be the one to say, "I didn't think it would happen to me..."

AC Safety Grounding



- And a friendly reminder from your AHJ*

LOCAL CODE IS THE LAW


- If you don't have a local code, use the NEC

* - Authority Having Jurisdiction

AC Safety Grounding



- If you aren't sure you know what you're doing...get a how-to reference

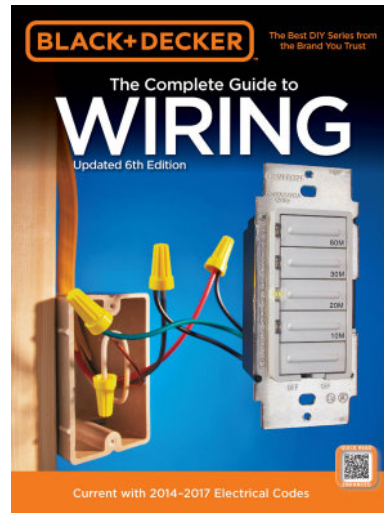


- Or hire a professional electrician

AC Safety Grounding




- Grounding for ac safety has several names
 - “Equipment ground”, “third-wire ground”, “green-wire ground”
- Purpose is two-fold
 - Provides a path to ac common point for fault current (shorts, leakage)
 - Stabilizes the ac power voltage during faults or transients, such as lightning

AC Safety Grounding

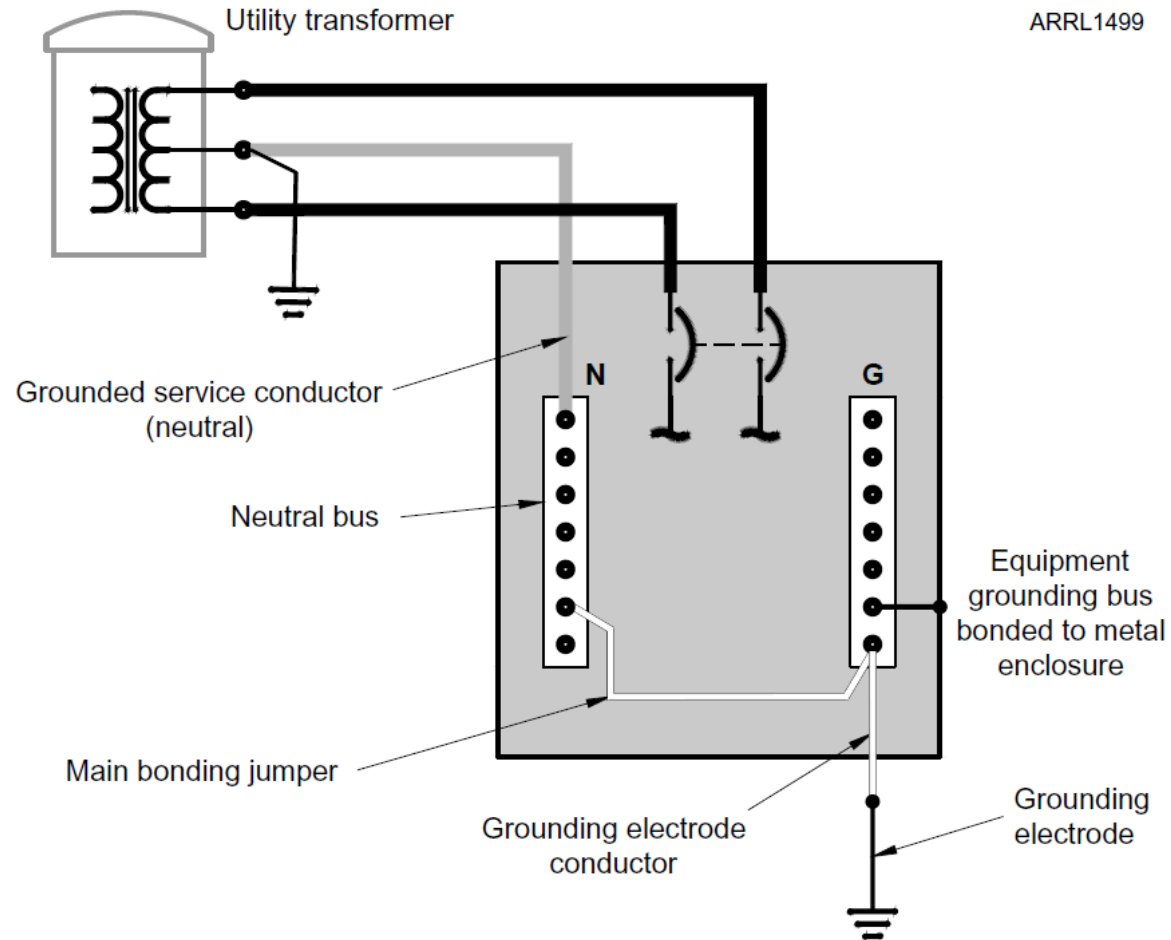


AC Safety Grounding

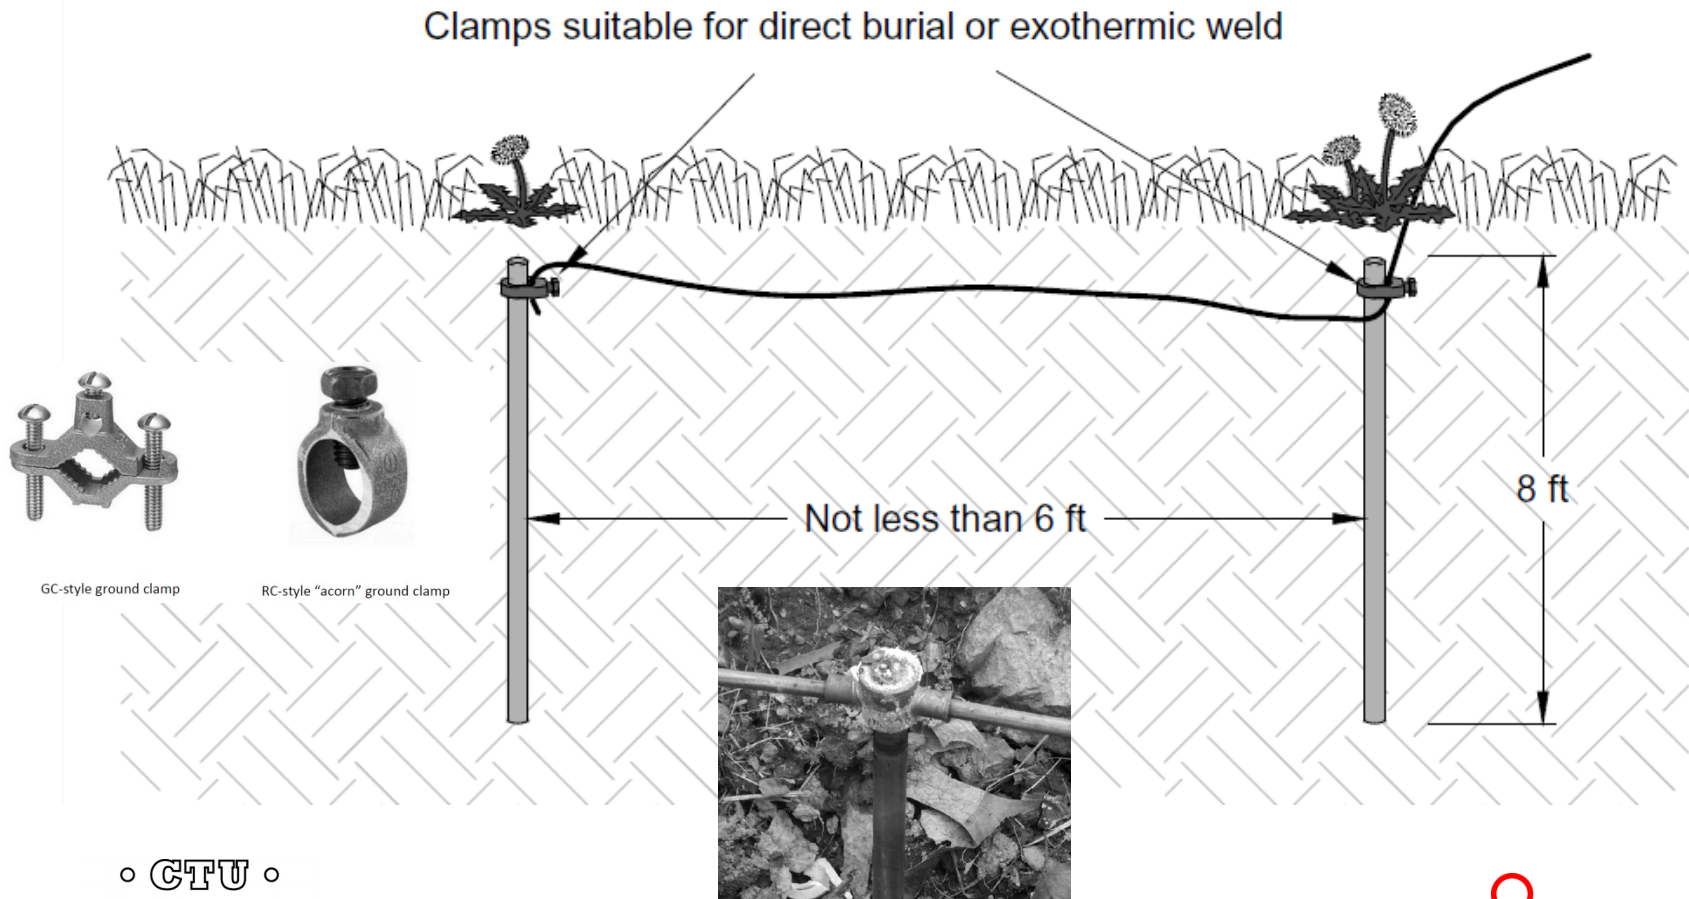

AC Safety Grounding



ARRL1495

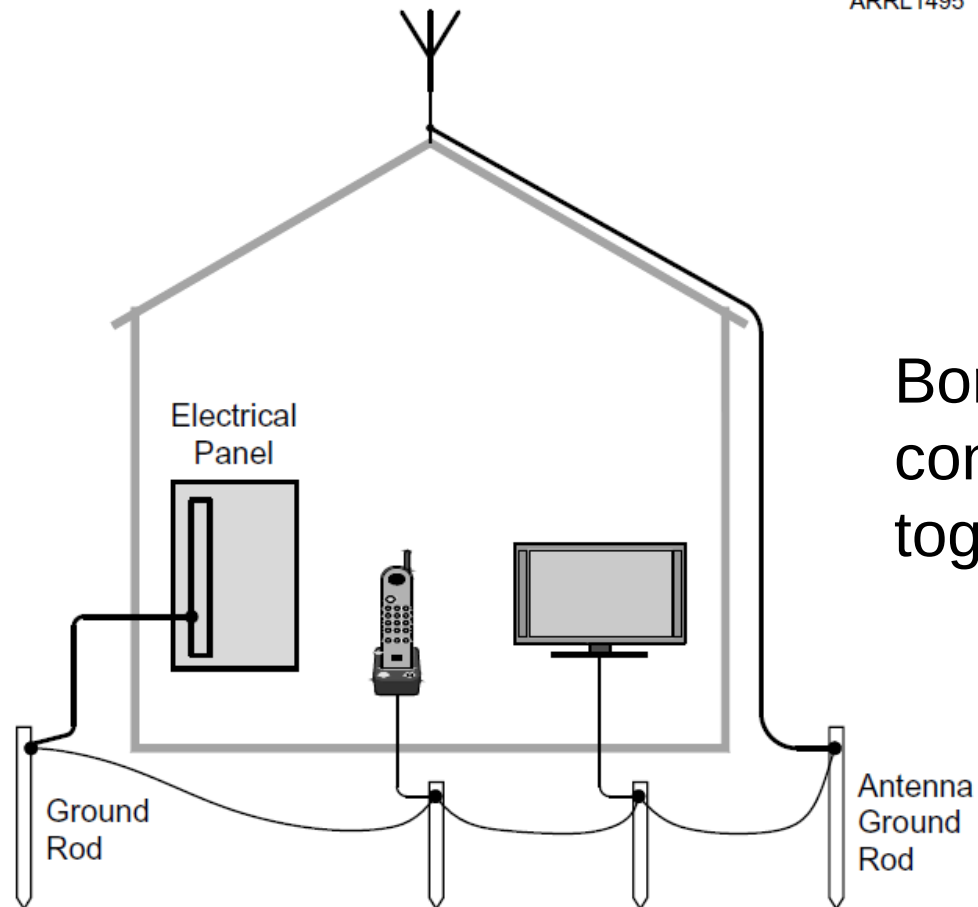

AC Safety Grounding



- Field Day and other temporary installations
 - Ground rod at generator not needed IF frame is connected to green wire – BUT is a good idea

AC Safety Grounding



- Field Day and other temporary installations
 - Ground rod at generator not needed IF frame is connected to green wire – BUT is a good idea
 - Ground rods at stations not needed IF equipment is green-wire grounded to generator...

AC Safety Grounding



- Field Day and other temporary installations
 - Ground rod at generator not needed IF frame is connected to green wire – BUT is a good idea
 - Ground rods at stations not needed IF equipment is green-wire grounded to generator...
 - BUT... the earth is a big resistor, so...

AC Safety Grounding



- Field Day and other temporary installations
 - Ground rod at generator not needed IF frame is connected to green wire – BUT is a good idea
 - Ground rods at stations not needed IF equipment is green-wire grounded to generator...
 - BUT... the earth is a big resistor, so...
 - Best practice: Ground rods at each station tied to gear & back to generator ground

AC Safety Grounding




- Field Day and other temporary installations
 - Ground rod at generator not needed IF frame is connected to green wire – BUT is a good idea
 - Ground rods at stations not needed IF equipment is green-wire grounded to generator...
 - BUT... the earth is a big resistor, so...
 - Best practice: Ground rods at each station tied to gear & back to generator ground
 - 12AWG THHN usually OK up to 100 ft (green!)


AC Safety Grounding



- Field Day and other temporary installations

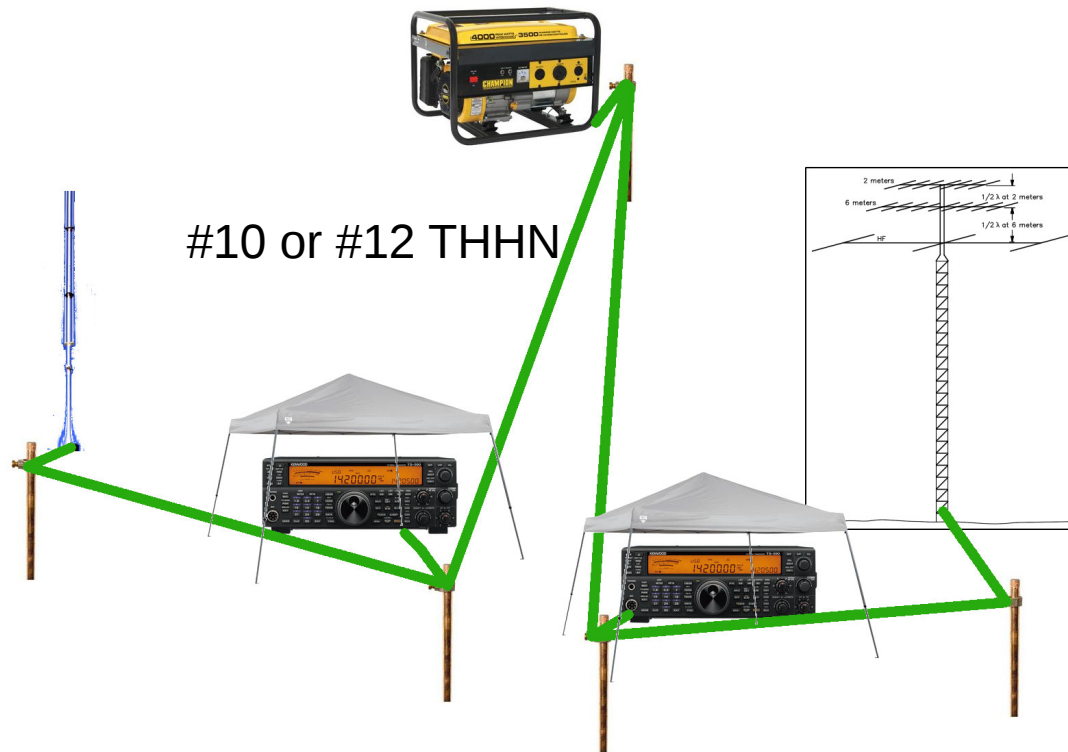

Lightning Protection

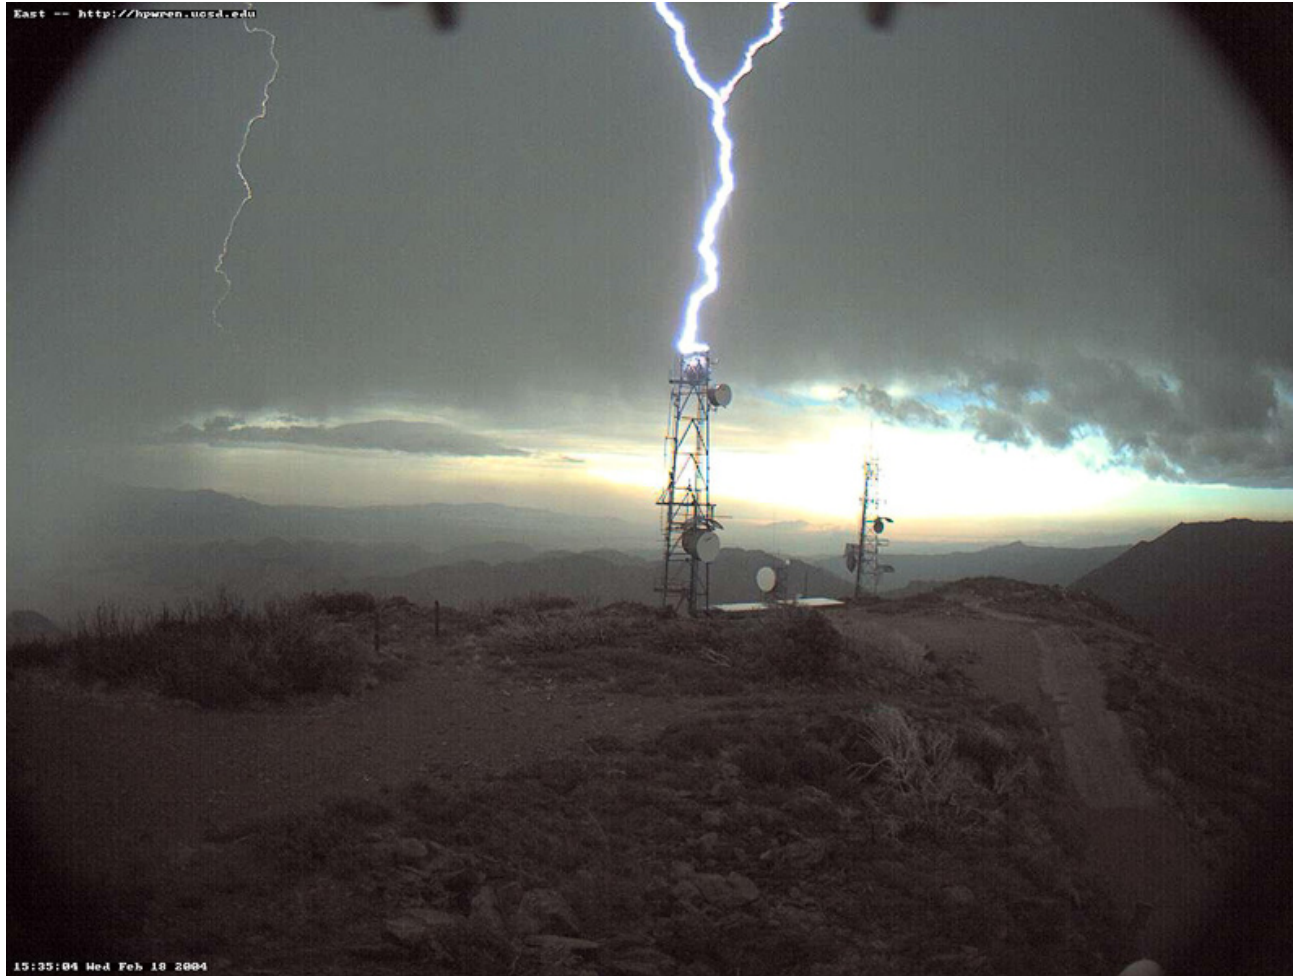

Lightning Protection




- You can't steer lightning, but...you *can* help lightning make “good decisions”
 - Heavy, low-impedance paths to the Earth
 - Inductance is more important than resistance
 - Paths should be *outside* your residence
 - Don't make it easy for lightning to go through your station on its way to the Earth

Lightning Protection




- Ground paths should go *around* your station

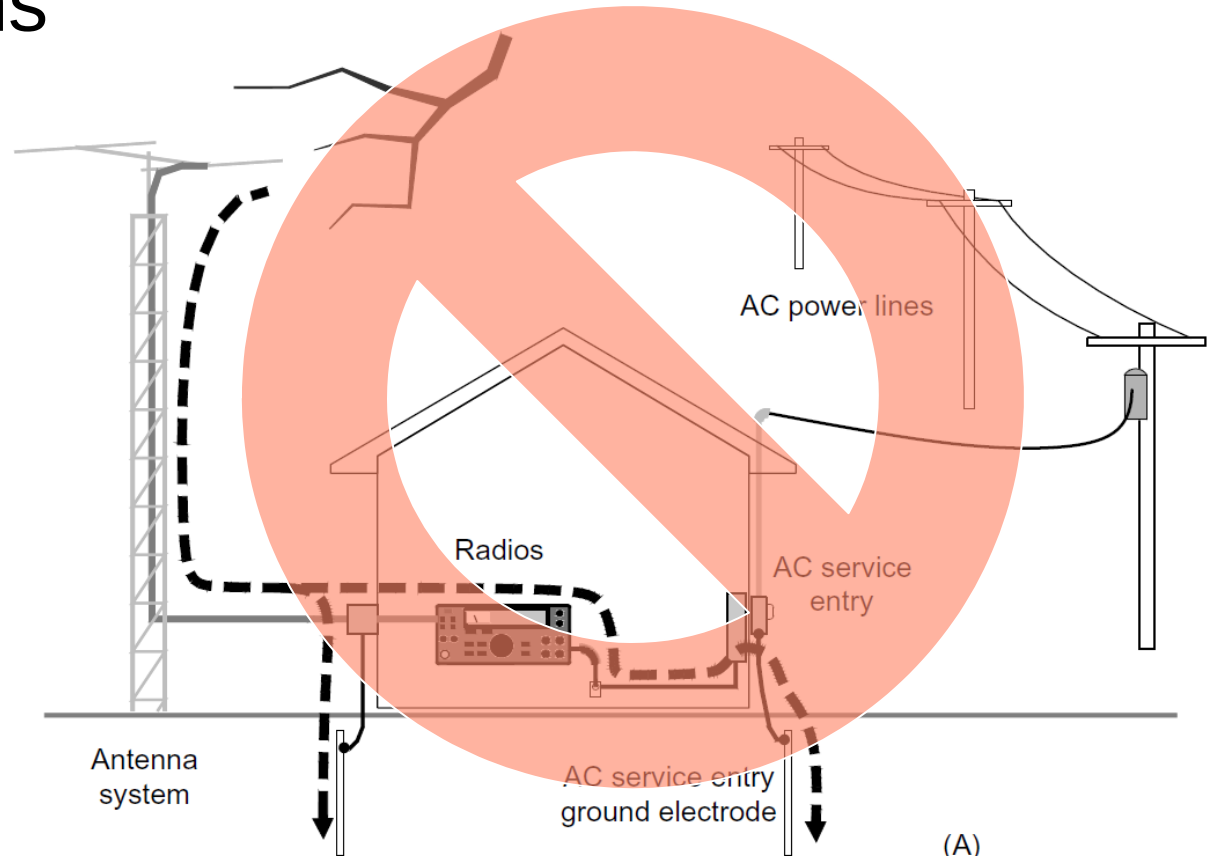

Lightning Protection




- Ground paths should go *around* your station

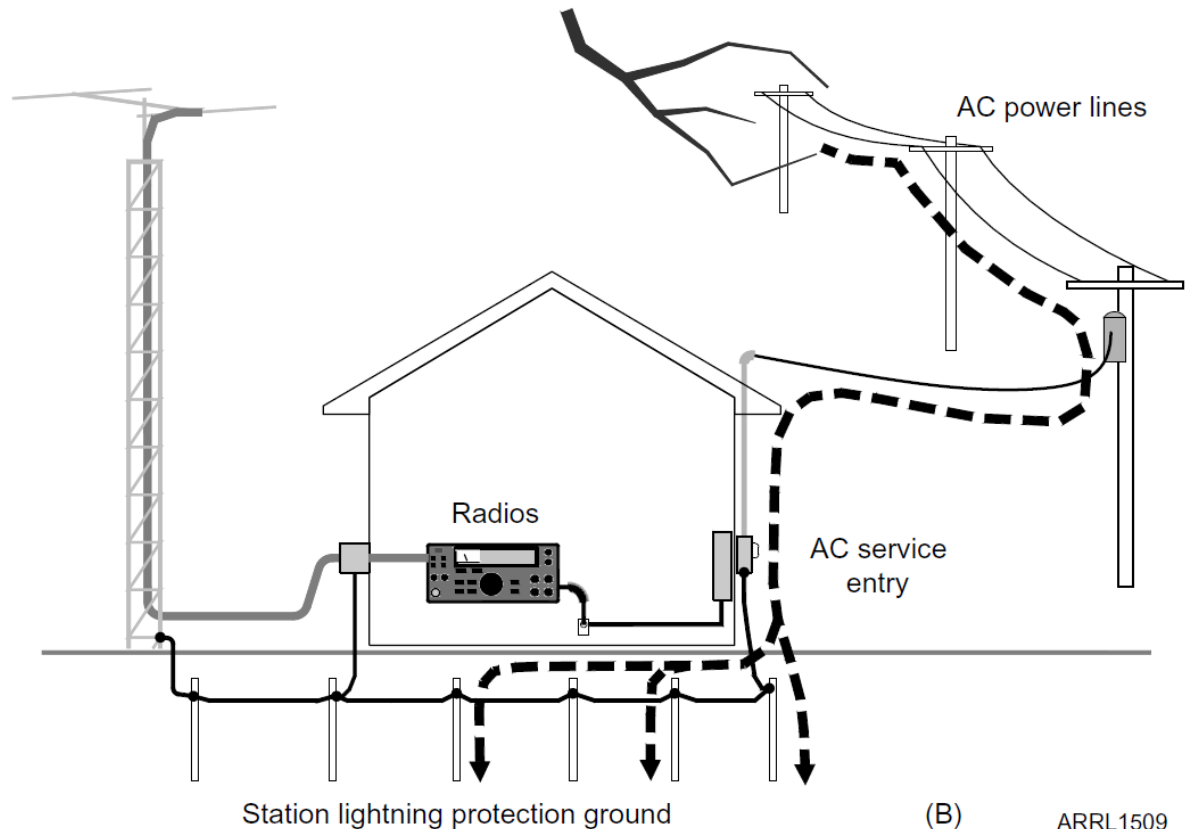

Lightning Protection



- Tower grounding

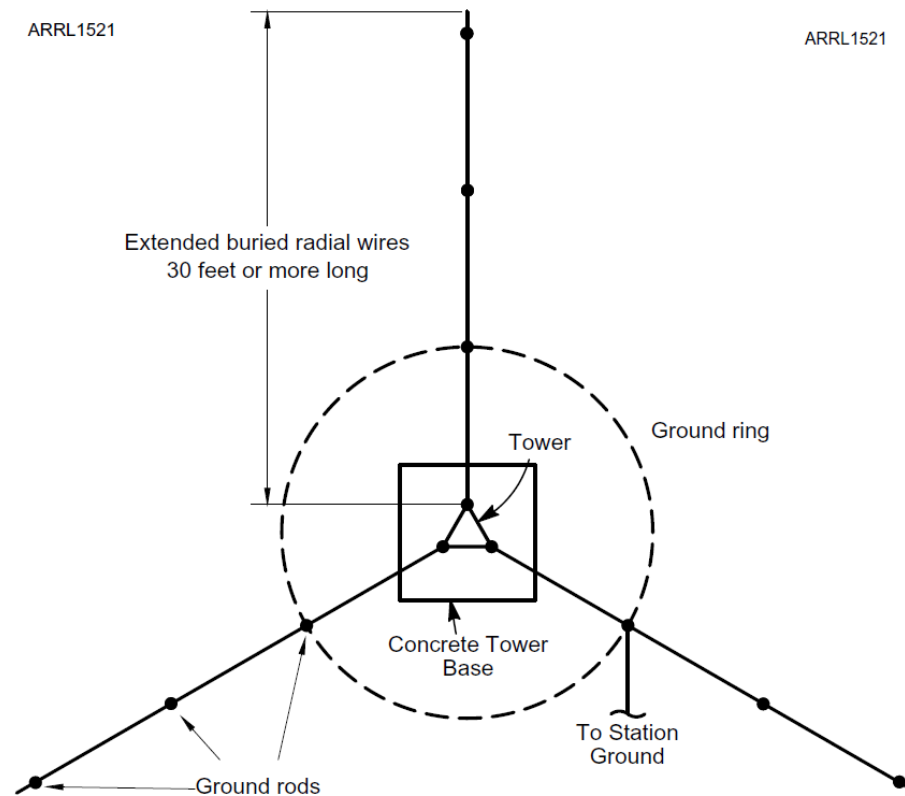

Lightning Protection



- Bond feed lines to the tower



- Spark gaps across insulators



Lightning Protection



- Spark gaps across insulators



WV KO 1570 kHz
Columbus, Ohio

Lightning Protection




- Spark gaps across insulators



Lightning Protection




- Vertical antenna protection

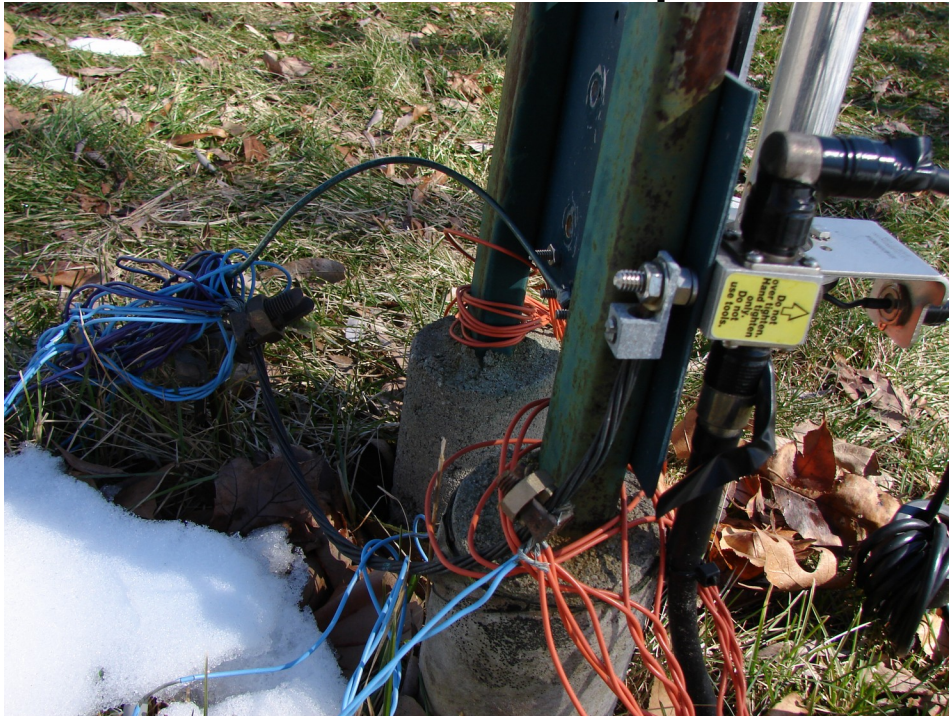

Lightning Protection



- Single-point Ground Panel



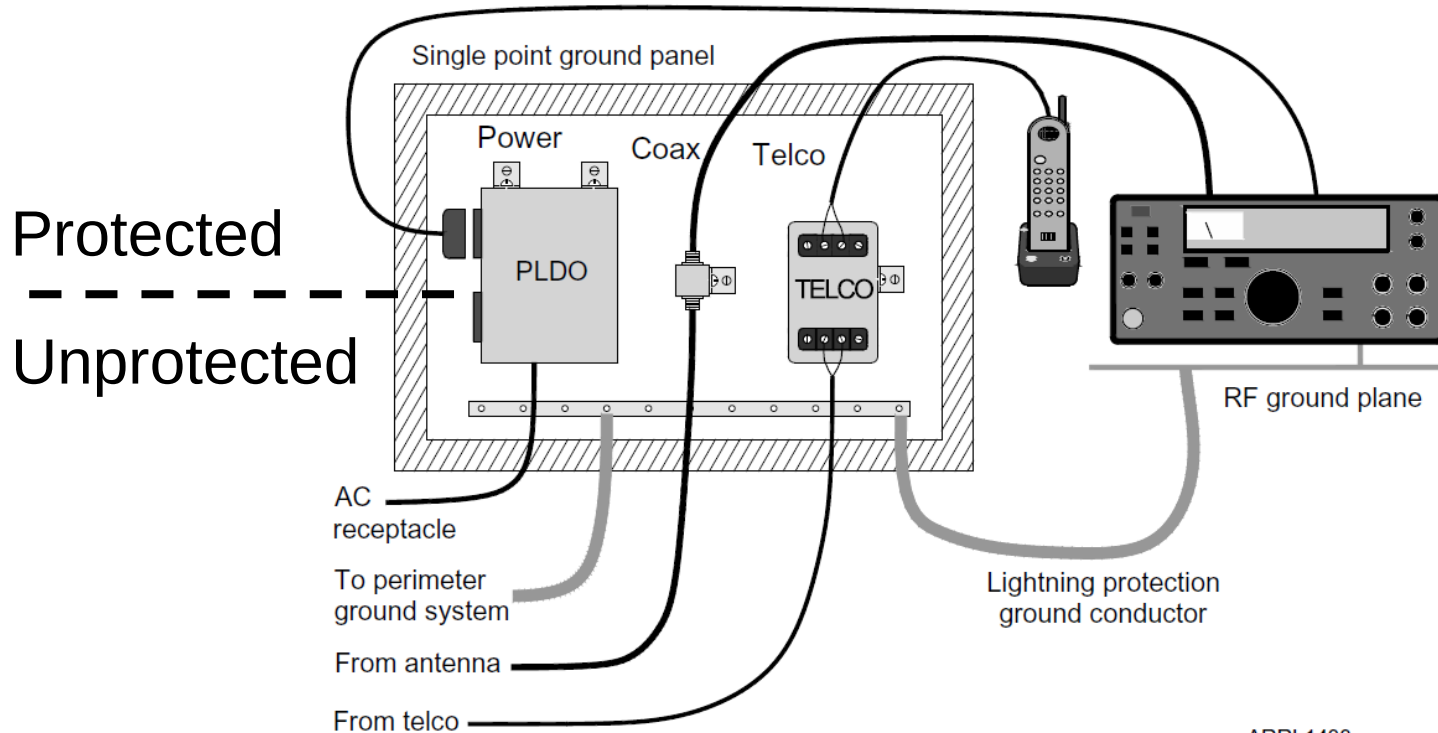


ARRL1433

Lightning Protection




- Single-point Ground Panel

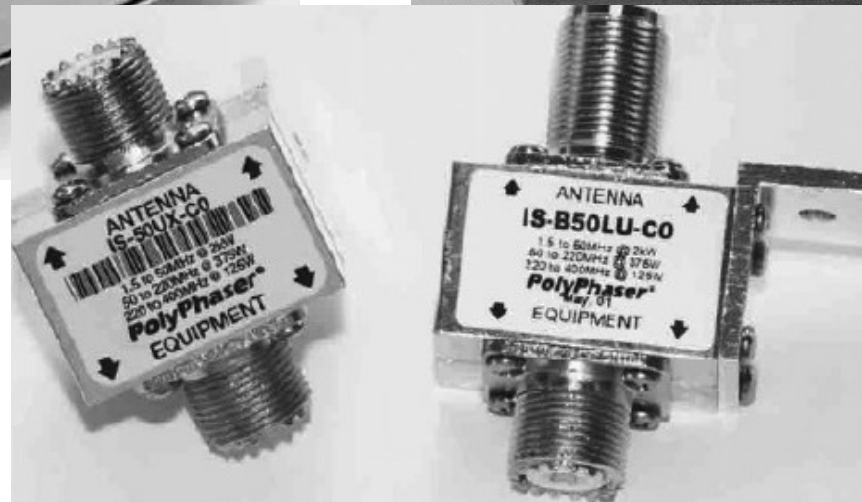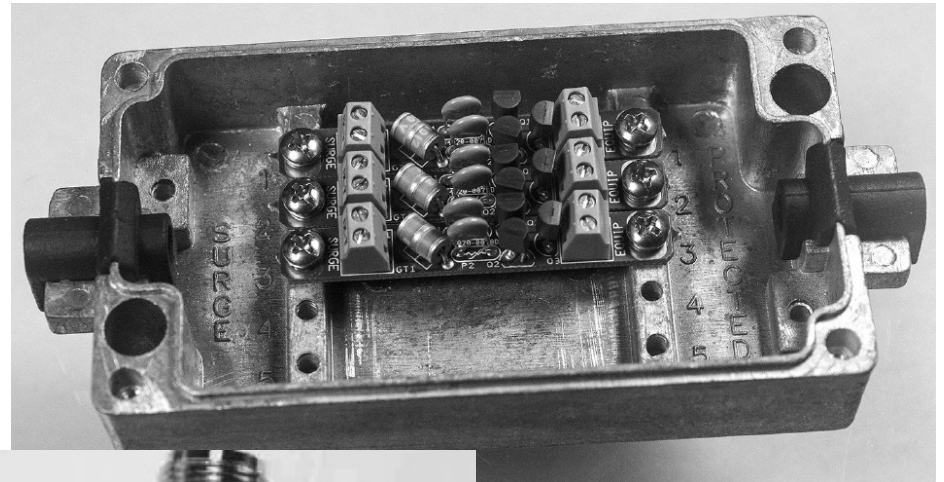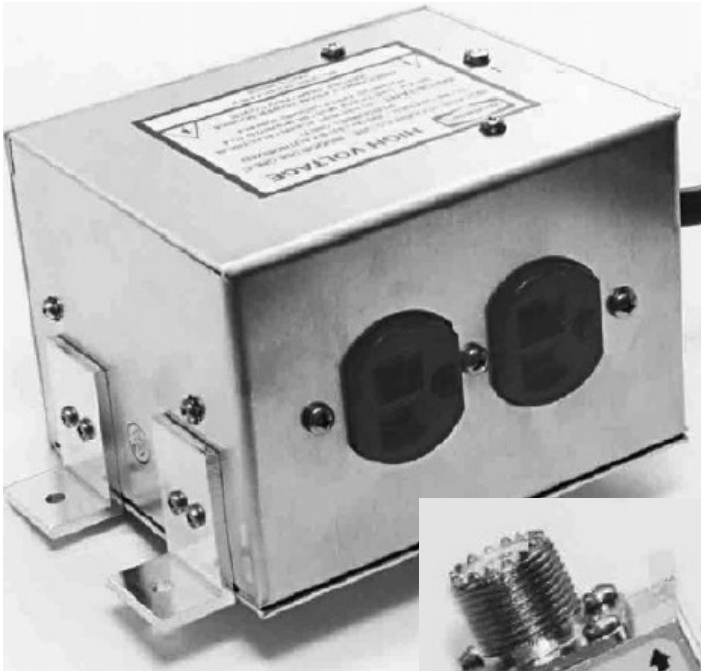


Lightning Protection

- Single-point Ground Panel

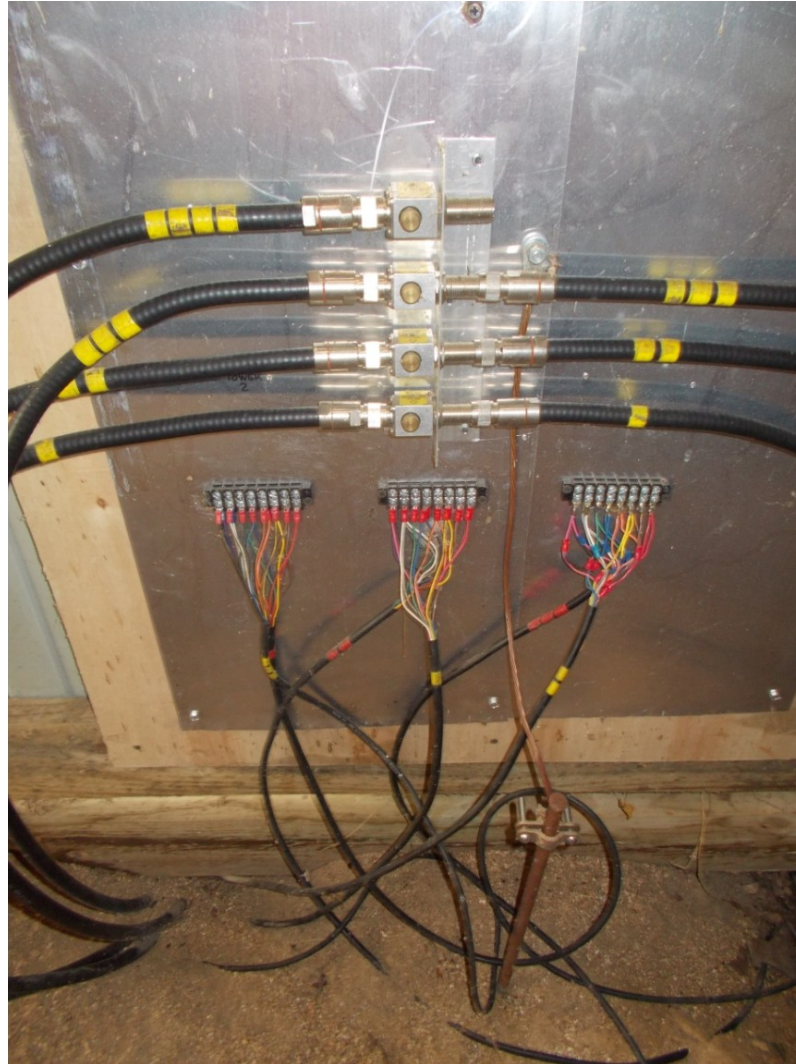

Lightning Protection


- Single-point Ground Panel

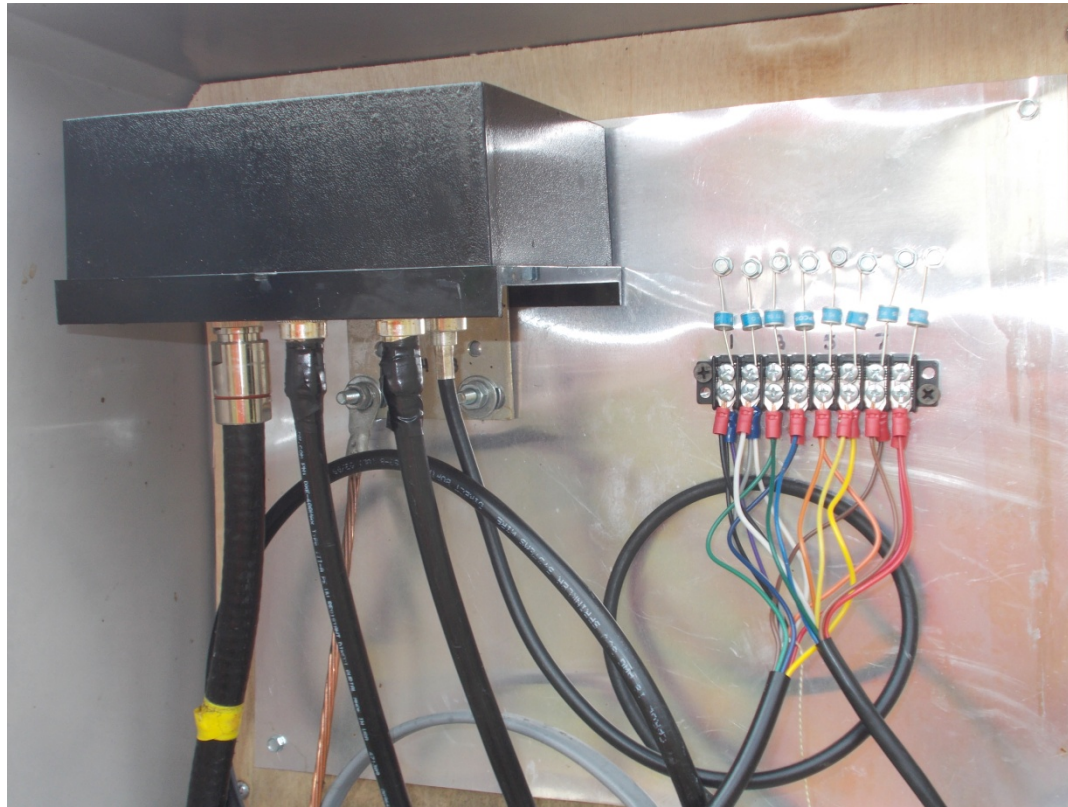

Lightning Protection



- Single-point Ground Panel

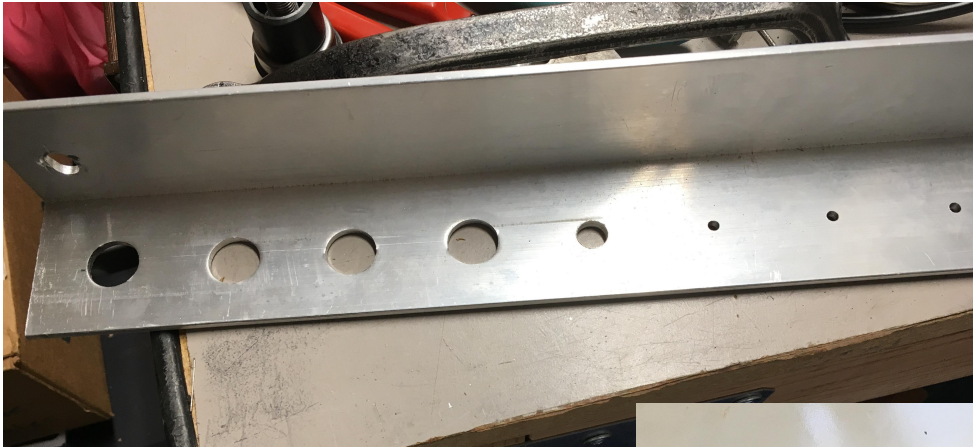

Lightning Protection


- Single-point Ground Panel



Lightning Protection



- Single-point Ground Panel

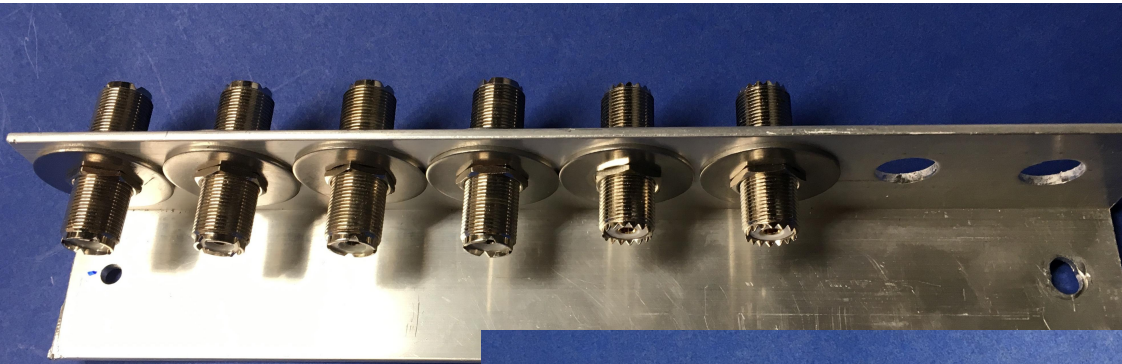

Lightning Protection



- Single-point Ground Panel



Lightning Protection

- Single-point Ground Panel




Lightning Protection



- Protected Zones


- Every line crossing the boundary must be protected
- Must all have a common or bonded ground connection
- Bond equipment within the station

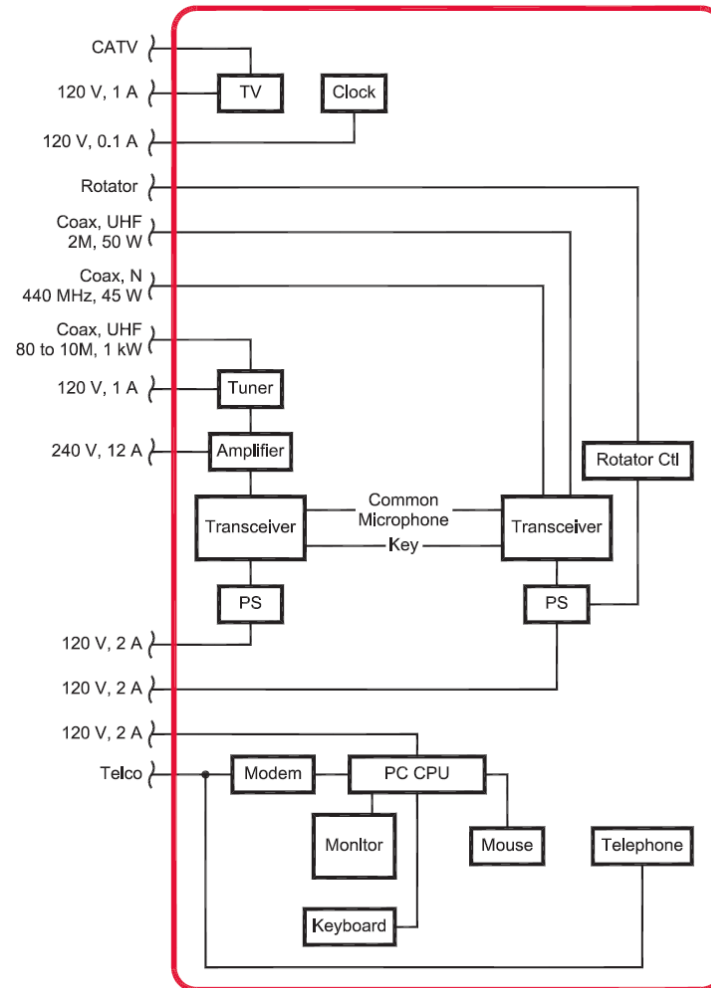

Lightning Protection



- Bonding inside the shack

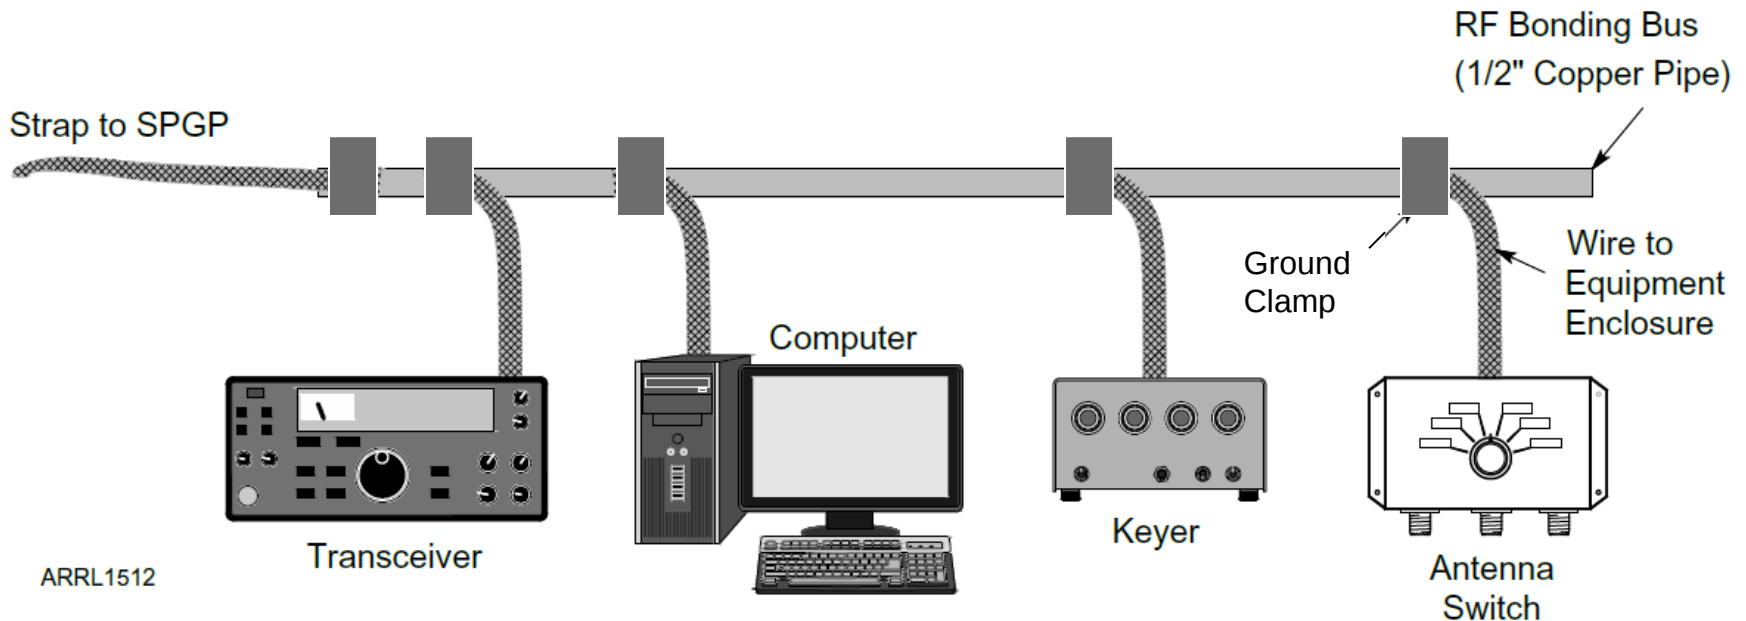

RF Management




- Everything in the station is an antenna

RF Management



● Everything!!

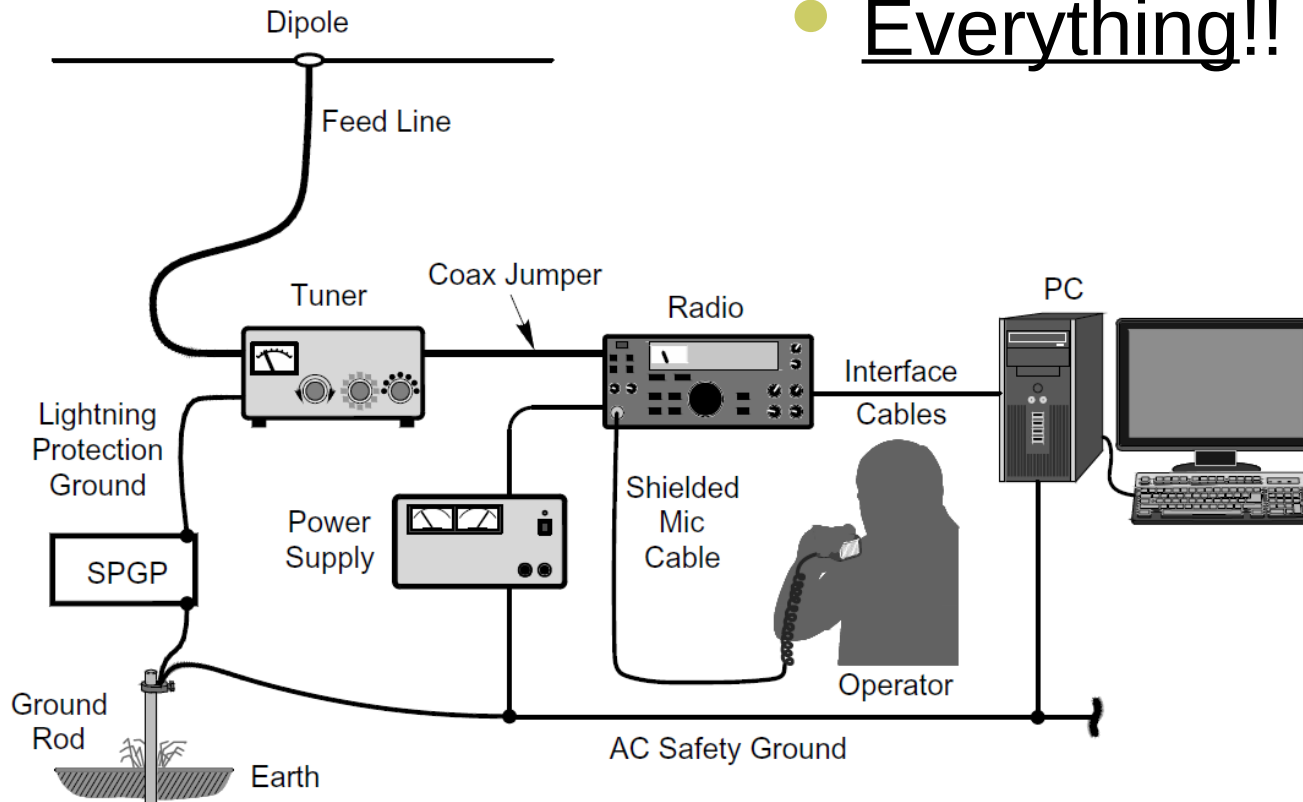

RF Management




- Everything in the station is an antenna
- Forget about an “RF ground”
- Concentrate instead on bonding
- Equalize voltage to minimize current
 - Eliminates “hot spots”
 - Reduces RFI from common-mode current
 - Reduces sensitivity to physical configuration
 - Minimizes audio “buzz” and hum

RF Management



- Keep cables short
- Use a bonding bus
- Minimize loop area

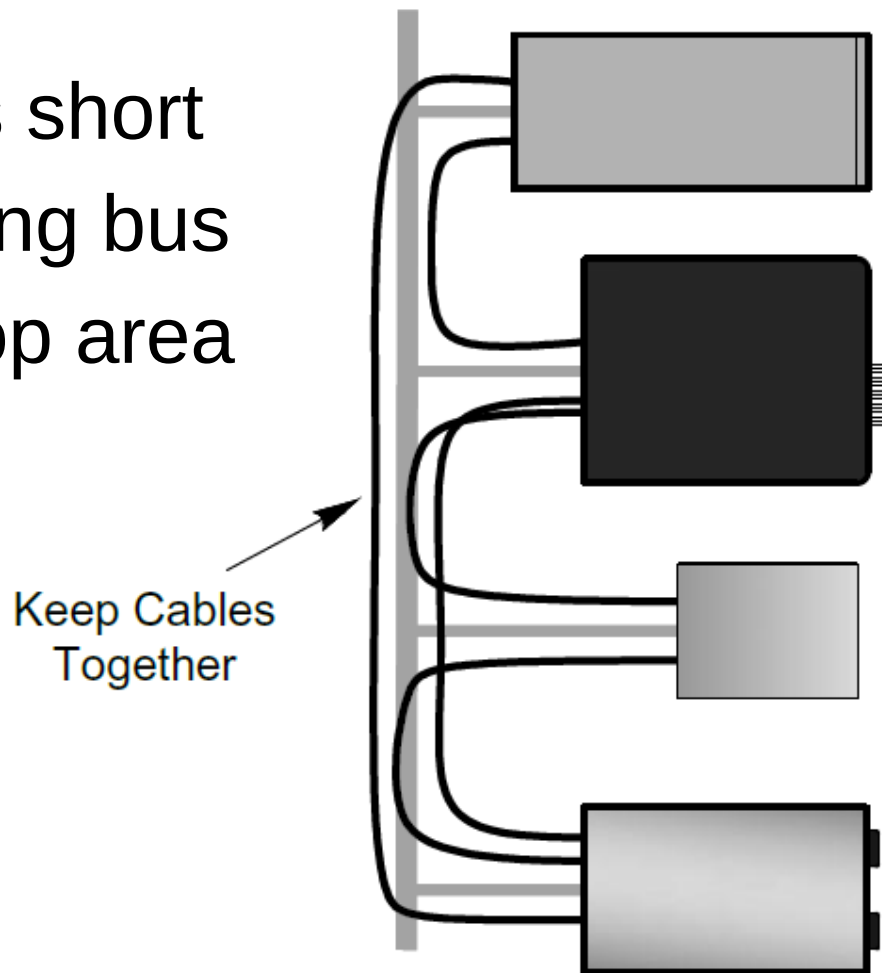

RF Management

- RF ground plane
- Sheet of metal
- Helps equalize voltage
- Run cables along the ground plane
- Bond to station ground system



Ground System




- Now for some good news...

Ground System




- “One system to rule them all”
- All currents flow on all wires
- A single, solid ground system made of short, heavy, direct connections satisfies all of the requirements for...
 - AC Safety
 - Lightning Protection
 - RF Management & Clean Audio


Ground System

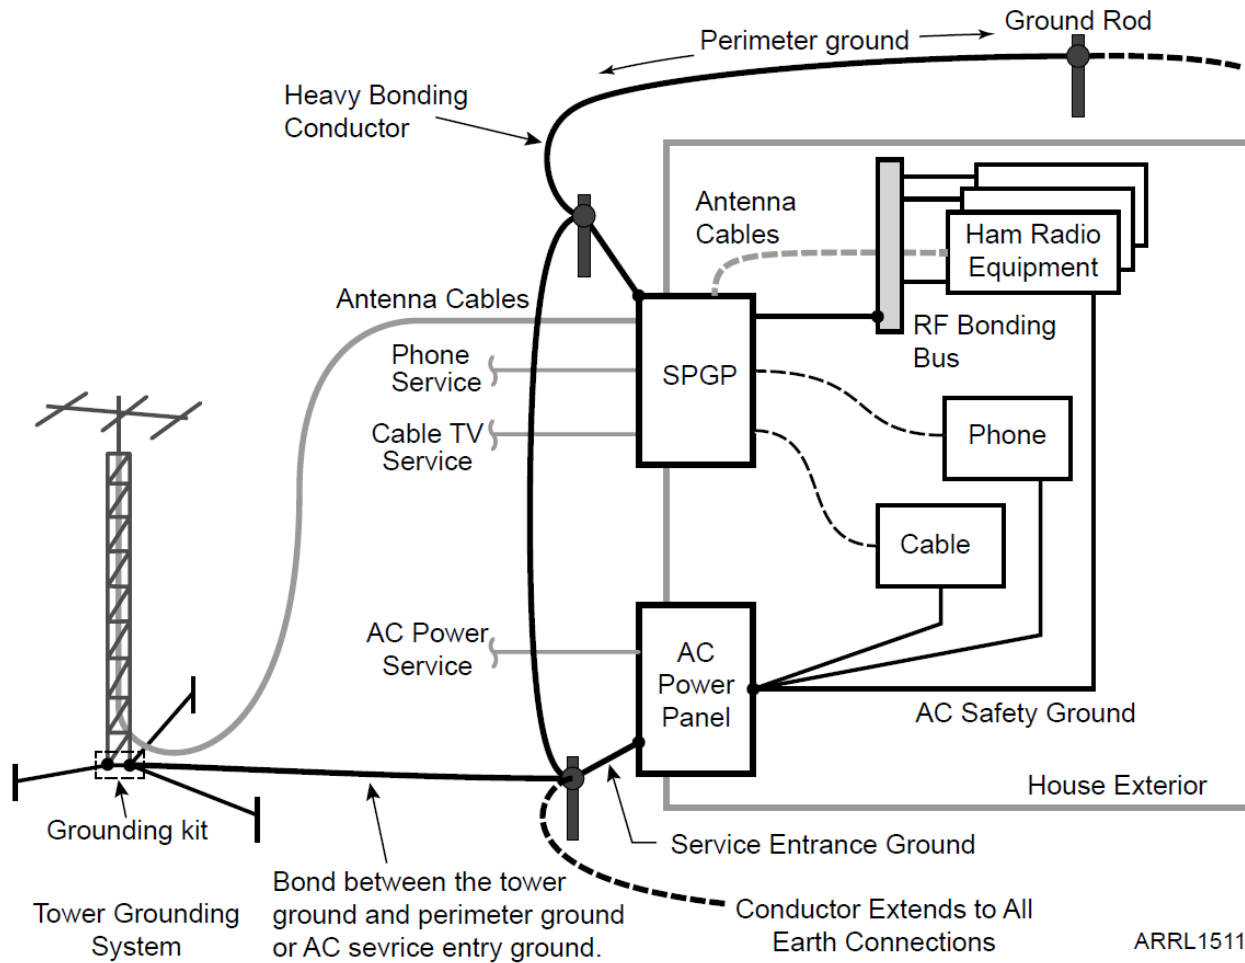

Ground System

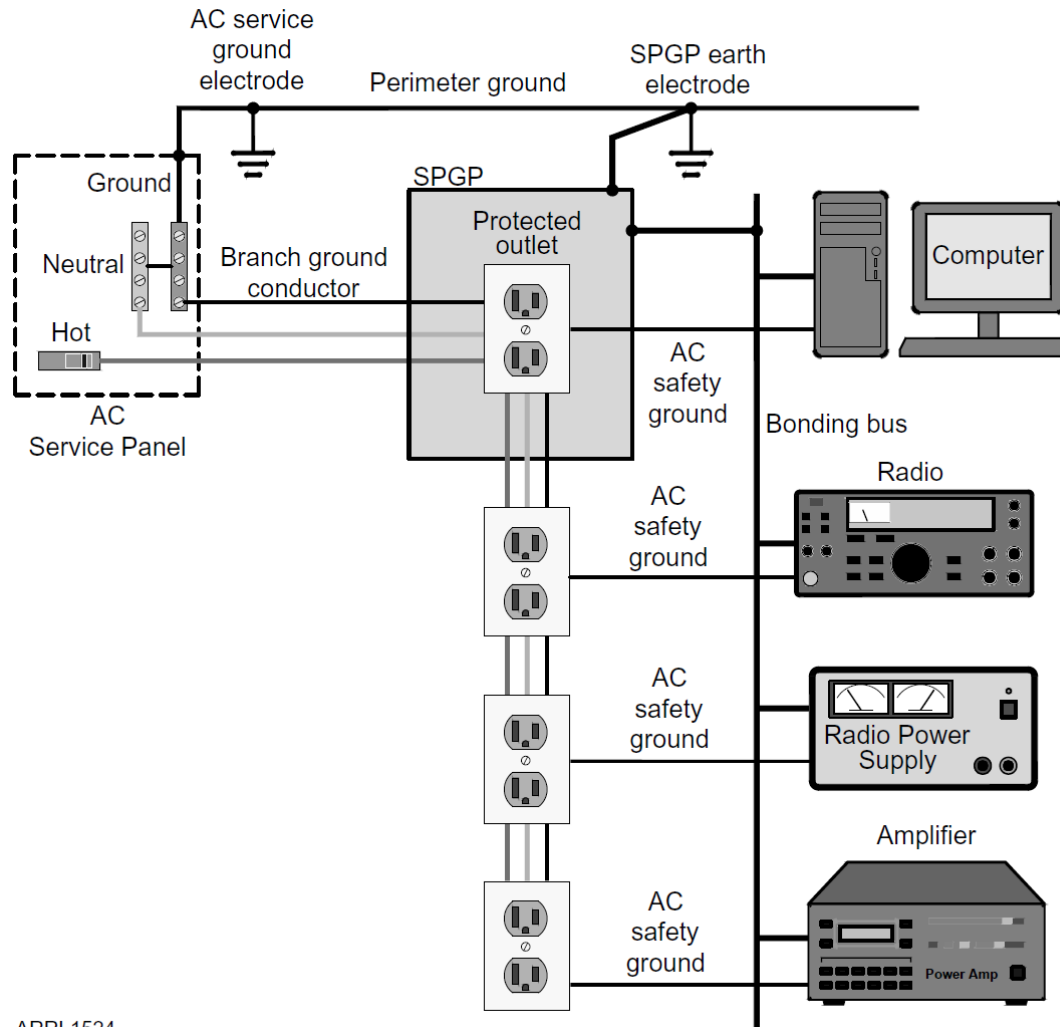

NF8M Ground System

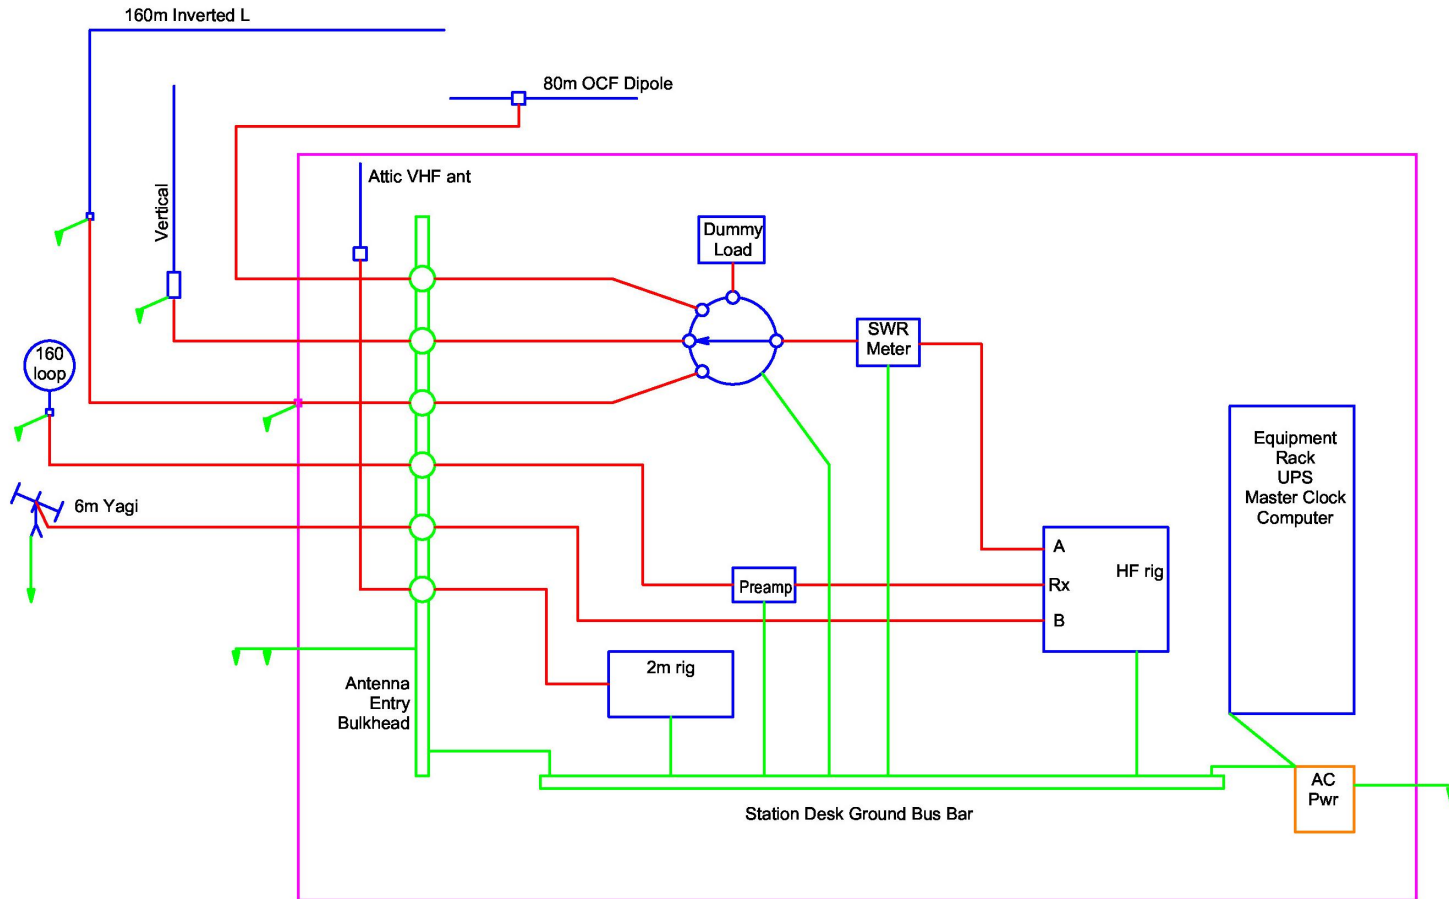

Additional Resources



- Professional Associations and Companies
 - National Fire Protection Association (www.nfpa.org)
 - International Association of Electrical Inspectors (www.iaei.org)
 - Mike Holt Enterprises (www.mikeholt.com) — training and continuing education for electricians, many tutorials
 - Polyphaser (www.polyphaser.com/services/media-library/white-papers) — various papers and tutorials on lightning protection for communications facilities, including ham stations
 - Lightning Protection Institute (lightning.org/learn-more/library-of-resources) — papers and tutorials on lightning protection techniques

Additional Resources



- Standards
 - FAA Document on Practices and Procedures for Lightning Protection, Grounding, Bonding, and Shielding Implementation — www.faa.gov/documentLibrary/media/Order/6950.19A.pdf
 - IEEE Std 1100 – 2006 “IEEE Recommended Practices for Powering and Grounding Electronic Equipment” — www.ieee.org (available from most libraries)

Additional Resources



- Standards
 - MIL-HDBK-419A – Grounding, Bonding, and Shielding for Electronic Equipments and Facilities (Vol 1 and 2) — www.uscg.mil/petaluma/TPF/ET/_SMS/Mil-STDs/MILHDBK419.pdf
 - AT&T Practice TP-76416 “Grounding and Bonding Requirements for Network Facilities” – <https://ebiznet.sbc.com/sbcnebs/Documents/ATT-TP-76416.pdf>

Additional Resources



- Books and Online Material
 - Block, R. R., The “Grounds” for Lightning and EMP Protection, Second Edition, PolyPhaser Corporation, 1993.
 - Rand, K. A., Lightning Protection and Grounding Solutions for Communications Sites, PolyPhaser Corporation, 2000.
 - ARRL Technical Information Service sections
 - Electrical Safety — www.arrl.org/electrical-safety
 - Grounding (various types and topics) — www.arrl.org/grounding
 - Lightning Protection - www.arrl.org/lightning-protection
 - W8JI’s web pages on ground systems (w8ji.com/ground_systems.htm)
 - Grounding and Bonding for the Radio Amateur by NØAX– ARRL Bookstore

◦ GTU ◦

CONTEST
UNIVERSITY

Dayton 2017

 **ICOM**[®]



Links and slides can be found on my website:

www.nf8m.com


Thanks to H. Ward Silver, NØAX
and Contest University

<http://contestuniversity.com>

(Sponsored by Icom)

Thursday, May 17 – Crowne Plaza, Dayton

Good Seats Still Available!

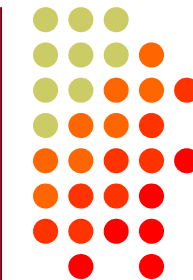

THANKS!!